

LIFTING BAG

Before using the equipment, please read carefully the following instructions

CAUTIONS :

Operating temperature range: - 20 to + 60 °C.
 Lay down ground sheet for unfolding the underwater lifter
 Keep away the underwater lifter from abrasive and/or sharp on surface area
 No walking on the underwater lifter
 For any contact with chemicals, please contact us.
Never exceed the maximum pressures 0,15 Bar

Handling and installation procedure outside water

Lay down ground sheet for unfolding the underwater lifter
 Unfold the underwater lifter
 Visual control of the state of the skin of the product, straps, accessories and good working properties of the valve

Handling and installation procedure in water

For the stowage of the load, please use the dedicated straps.
 The relevance of the fixation point is paramount, it should allow a solid grip to salvage the load without any risks of rotation.

An alignment with the center of gravity of the load is necessary.
 It is important to use underwater lifting bags with a total capacity slightly in excess of the load to be lifted. Always remember that a fully inflated lifting bag is not intended for a free unloaded flight to the surface. The rapidly expanding air may overwhelm the pressure relief valves, causing the bag to rupture.

To keep the load right, fill up the underwater lifter with air step by step to reach a neutral buoyancy effect. During the inflation process, it's recommended to move away from the load. Air volume adjustment can be done with the valve.

Underwater load movements

Once the load has been moved and secured, remove and purge the lifting bag by using the valve.
 Micro leaks can occur after inflation and causes no risk when using
 Once the load could be moved in safety, vent the underwater lifter

CLEANING :

When the operation is done, please clean up both inside & outside of the underwater lifter with soap water.
 Rinsing & drying steps to follow.
 Never use any aggressive detergent.

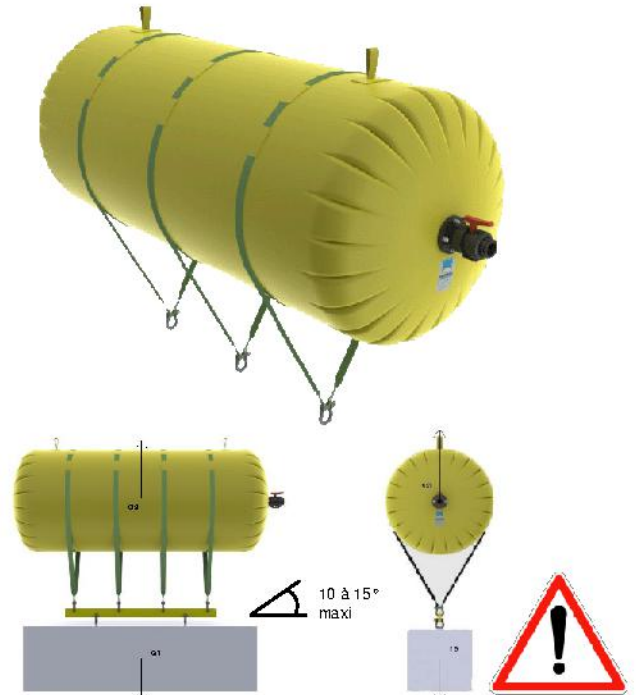
STORAGE:

This product must be stored:

- Folding in box
- At ambient temperature & moisture conditions varying from 40% to 70%.
- Away from any potential sources of damage (corrosive agents and vapours, solvents, marine environment, rodents...)

MAINTENANCE:

Should the underwater lifters be stored, a full inspection is required on a year basis. Visual inspection of the skin to detect any holes, cutting, damages related to abrasion, delamination and mildew.
 Please contact us prior undertaking any repairs


"KEEP YOUR ENVIRONMENT CLEAN"

For the disposal of wastes generated at the end of life, respect the laws and regulations of your country.
 Contact the appropriate organism for recovery and waste treatment

A PRONAL TEAM IS AVAILABLE TO ASSIST WITH ANY INSTALLATION. PLEASE CONTACT US.